
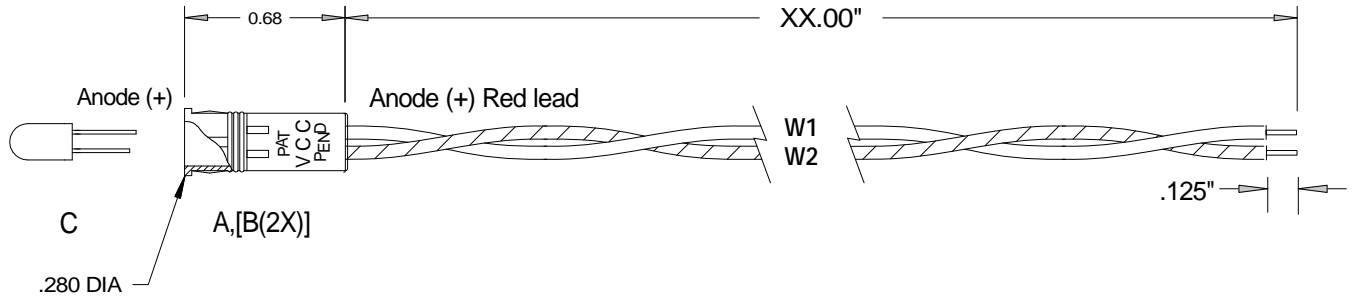


APPROVAL	DATE

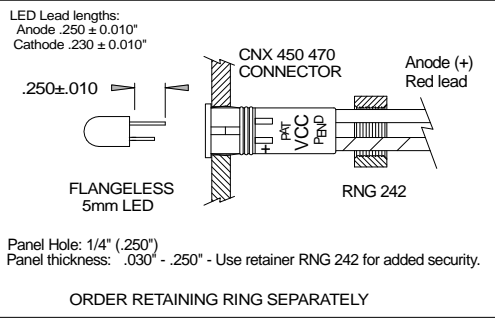

**ORDER CODES**

STANDARD LENGTHS	
XX = 04	4.00"
06	6.00"
08	8.00"
12	12.00"
18	18.00"
24	24.00"

\* Custom lengths available upon request.

CODE (LL)	LED DESCRIPTION (All are Flangeless)	LED PN
01	Red	VAOL-5MAE2
02	Yellow	VAOL-5MCE2
03	Green	VAOL-5MDE2
04	Blue	VAOL-5MSBY2
05	White	VAOL-5MWY4
10	Red/Yellow, Bi-lead	VAOB-5H2ACE2
11	Red/Green, Bi-lead	VAOB-5H2ADE2
12	Yellow/Green, Bi-lead	VAOB-5H2CDE2

\* Other LEDs available upon request.  
 Please see LED data sheets for LED specifications.

U.S. / FOREIGN PAT. ISSUED & PEND.

**NOTES:**

- Material: U.L. Rating - "Thermoplastic material used on a secondary circuit"
- Wire: 1007/1569 24 AWG stranded (105° C), color Red/Black
- Opto: LED per order code in table.  
See individual specification sheets for LED data.
- Leads: LED leads trimmed to .250" ± 0.010" anode, and .230" ± 0.010" cathode.

REVISIONS			
NO	DESCRIPTION	DATE	BY
1			
2			
3			
4			
5			
6			

**VCC P/N: CNX K X 4 2 XX LL**

**VCC VISUAL COMMUNICATIONS COMPANY, INC.**  
 190 Bosstick Blvd., Suite 101 San Marcos, California 90269 U.S.A.  
 Phone (760) 560-1300 Fax (760) 560-1301 e-mail vccsales@vcclite.com

TOLERANCES	SCALE N/A	DATE 8/8/08	DRAWING NO.	REV.
DECIMAL .xx = ±.50, .xxx = ±.010	DIAMETER	DRAWN BY JDG	CNX KX4212LL	
ANGLE	RADII	CHK'D		