



04 Series Candelabra Screw Non-Grounded Lampholders

- **6" WIRE LEADS**
- **BRASS SHELL IN BLACK POLYESTER HOUSING**
- **MAXIMUM RATING: 75 WATTS, 125 VOLTS**
- **UL Recognized ⁽¹⁾ • UL File E20356**



Overview

The 4 Series lampholders are supplied with a brass shell in a polyester molded housing. Lampholders are supplied with 6" two wire leads and are non grounded. Many bracket and mounting options are available including a 15/16" mounting hole plug button and a threaded bushing for 13/32" mounting holes. Lampholders are designed for use with candelabra screw lamps.

Specifications

Shell: brass.

Housing: black polyester. White housing also available upon request.

Wire leads: 6" **Leads:** #18 AWG, black & white, bare copper, PVC insulated, UL/CSA rated 105° C, stripped 1/2". Non-grounded units are supplied with two 6" wire leads. Custom wire length, stripping, termination and wire type are also available.



Mounting:


Brackets⁽¹⁾: .025" to .032" zinc plated steel. Custom brackets and plating types are available.

Threaded bushing: for 13/32" diameter mounting hole. Supplied with lockwasher and hex nut.


Plug button: zinc plated steel for 15/16" mounting hole.

⁽¹⁾ Only item with brackets are UL Recognized

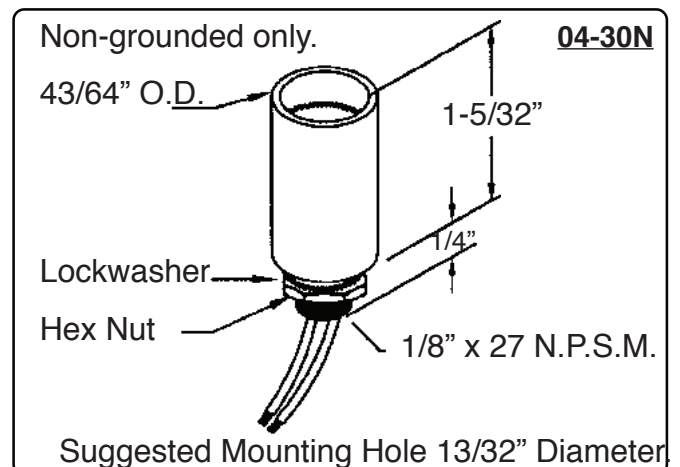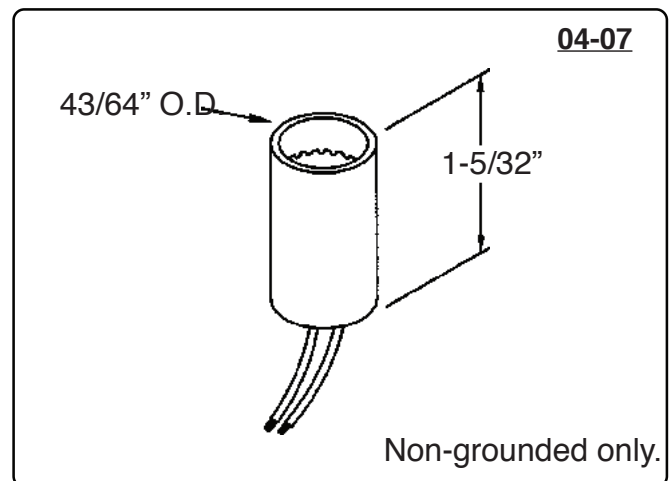


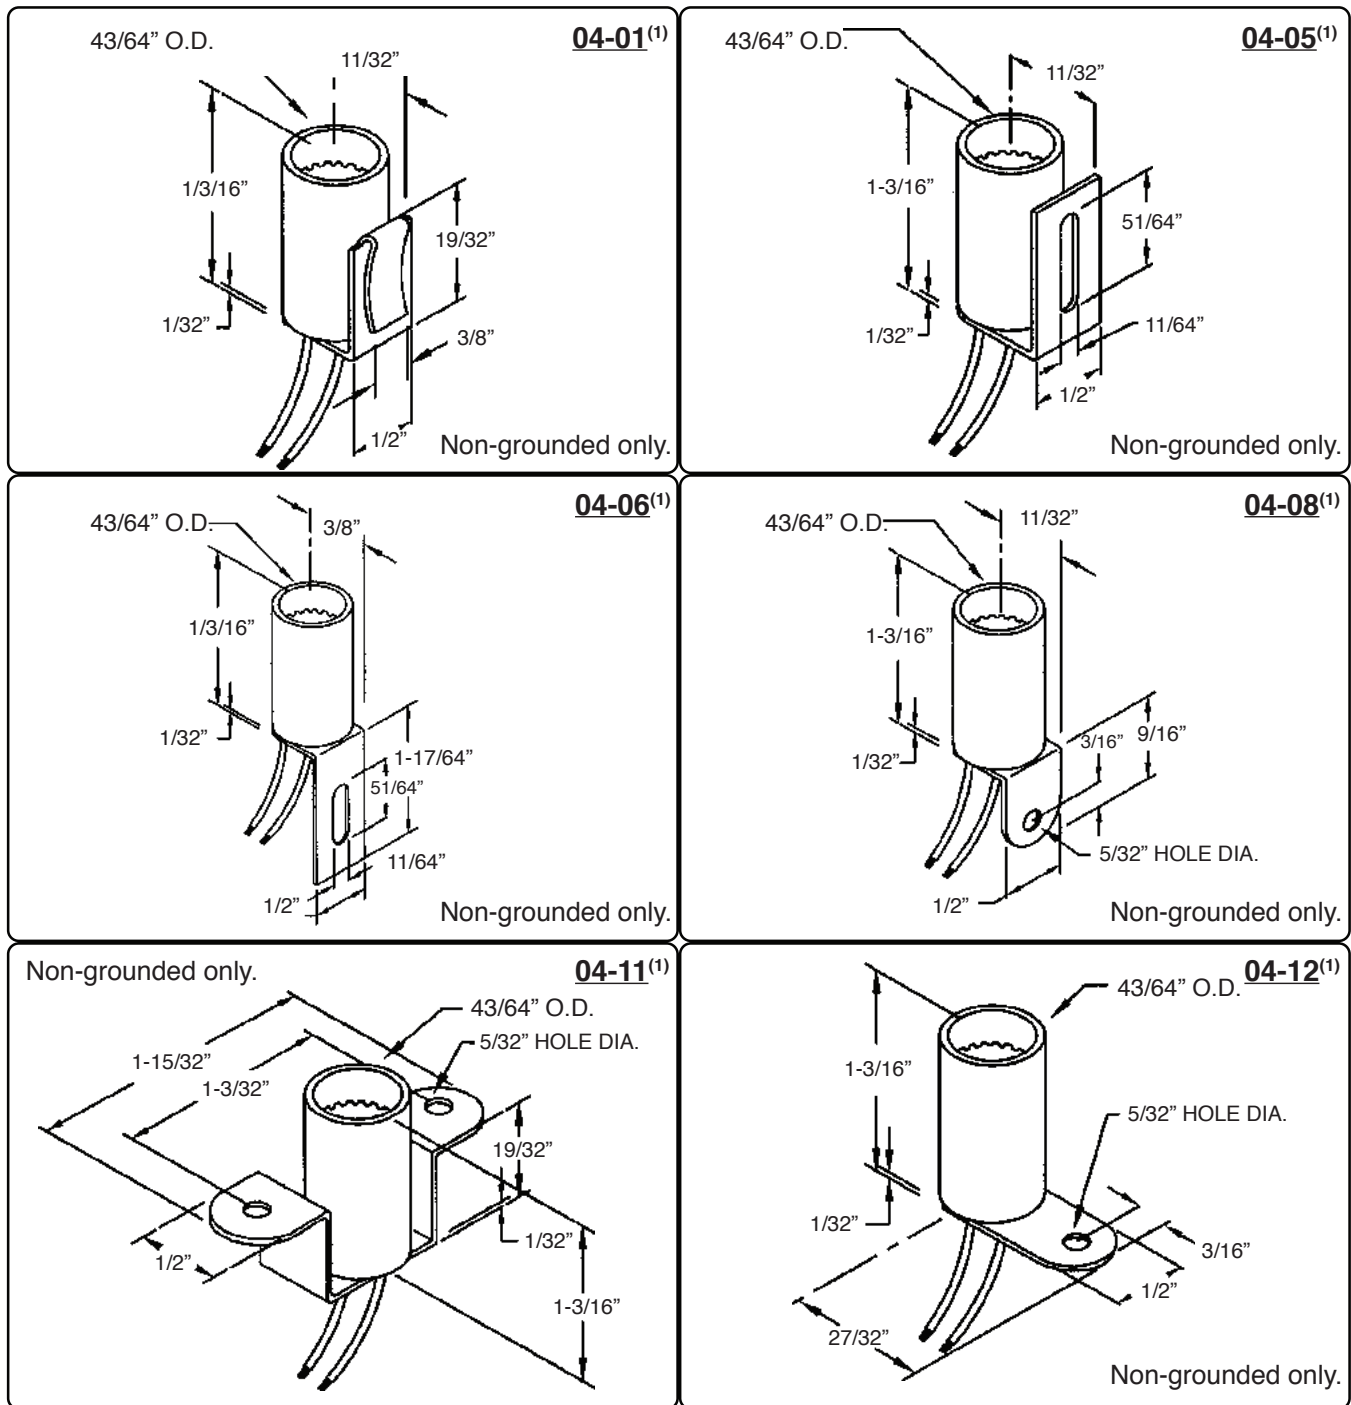

⁽¹⁾ Only item with brackets are UL Recognized

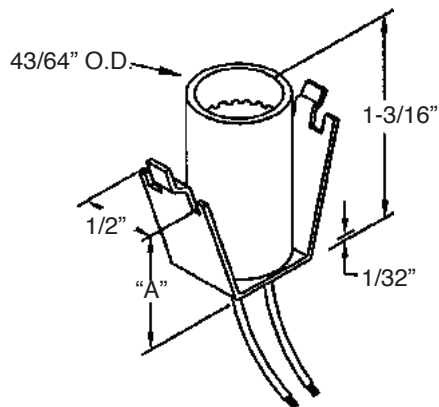

Mounting Hole Diagram




Bracket No.	"A" Dimension
-15	1-5/32"
-18	1-13/32"
-82	15/16"

Maximum Panel Thickness .045"


04-15⁽¹⁾
04-18⁽¹⁾
04-82⁽¹⁾

Non-grounded only.

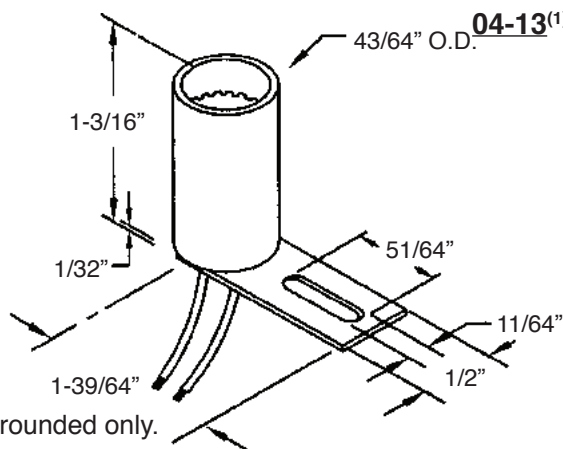


04-13⁽¹⁾

Non-grounded only.

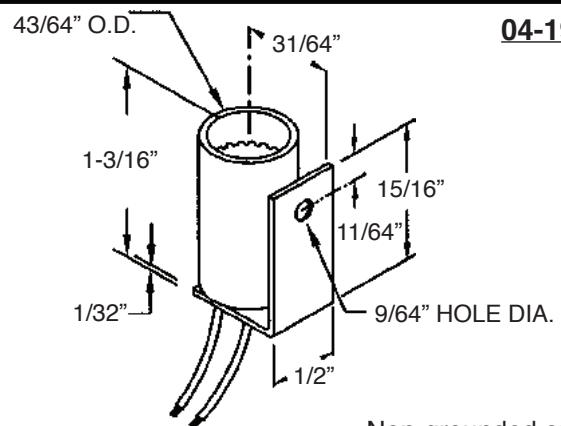

04-19⁽¹⁾


For reversed bracket: **04-20⁽¹⁾** Non-grounded only.

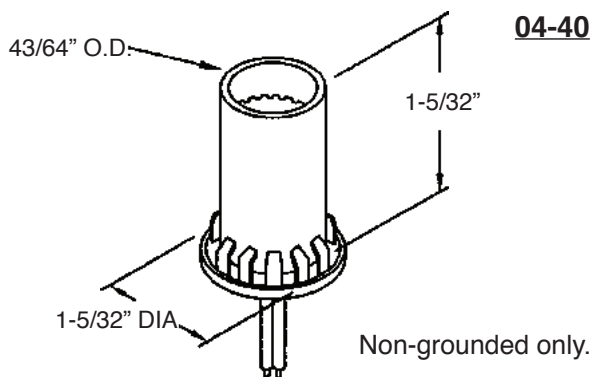

04-40

Non-grounded only.

Plug Button: zinc plated steel for 15/16" hole.
for pannel thickness range 1/32" to 5/64".

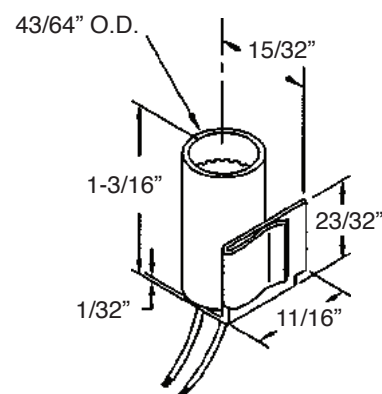

04-65⁽¹⁾

For reversed bracket: **04-55⁽¹⁾** Non-grounded only.

⁽¹⁾ Only item with brackets are UL Recognized

Compliances and Approvals

