



## **2802 Series Relampable Incandescent Indicator Light**

## **Description and Features**

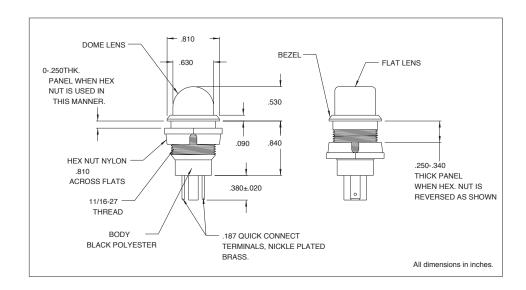

## **Lens Specifications**

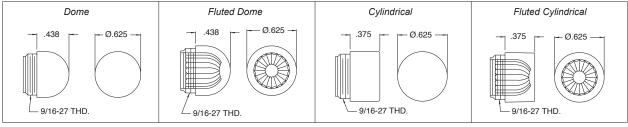

All dimensions in inches.

## Ordering Information:

For use with T-2 Slide Base (standard) lamps.

Complete assembly consists of socket (2802), lamp, and lens (see chart below).

Items supplied unassembled.

Lamp, lens and socket must be ordered separately.

Mounting: Supplied with polyester hex nut. Lens:

Polycarbonate-threaded Body: Black polyester

Terminals: Nickel plated brass

Bezel: Black

25P lens series Thread Spec: 9/16-27 UNS-2A

Lens Part No:	Description
25P-306*	Transparent dome
25P-307**	Translucent dome
25P-326*	Transparent fluted dome
25P-606*	Transparent cylindrical
25P-607**	Translucent cylindrical
25P-626*	Transparent fluted cylindrical
(*) R=Red, A=Amber, G=Green, C=Clear	
(**) R=Red, Y=Yellow, G=Green, W=White	

Note: For 120 volt applications, CML recommends the use of a slide base neon lamp, rather than an incandescent lamp.

