



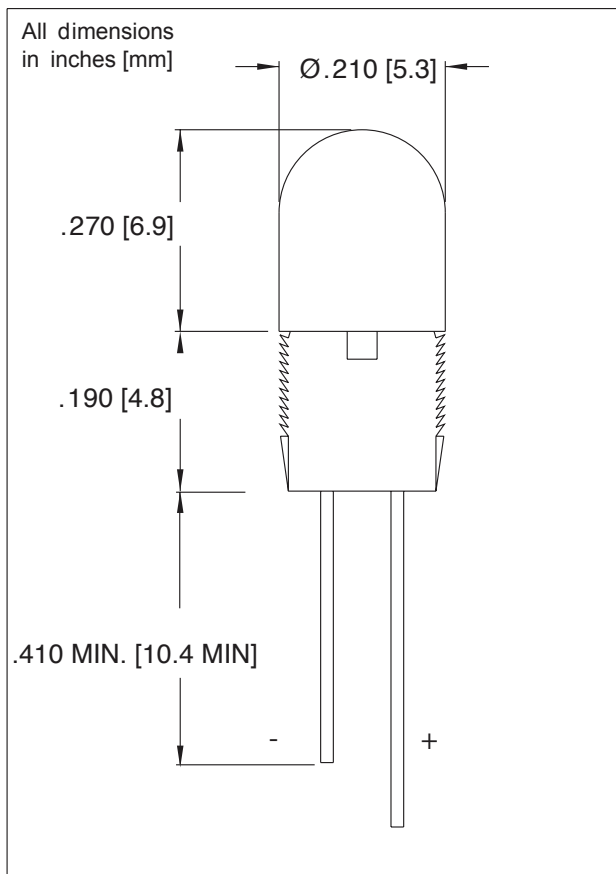

5200F Series Panel Mounted LED Indicator

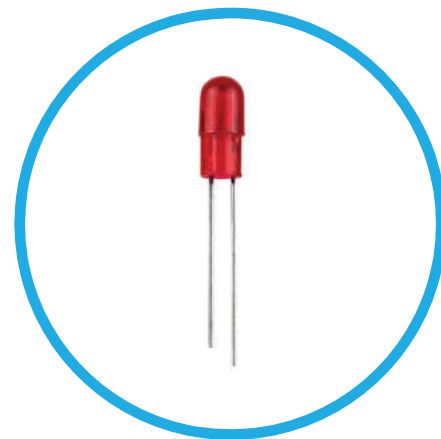

Features

- Quick push-in panel mounting
- Attractive appearance.
- Wide angle visibility.
- High-intensity light output (GaAsP on GaP for red GaP for green.)

These assemblies offer the superior performance of SUPER BRITE LEDs in a package that is economical to buy and install.

Mounting: Will snap-fit into $\varnothing .187/.192$ [4.75/4.87] hole in panels $.020/.097$ [.51/2.46] thick

Lens: Polycarbonate

Electro-optical Characteristics

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Peak Forward Current @1ms - 20% Duty Cycle (mA)	Reverse Break-down Voltage Min. (V)
5200F1	Red	16	10	20	2.0	3.0	60	3
5200F5	Green	25	10	25	2.1	3.0	60	3