

LED Holder Options

**CNX B**  
Dia. 0.171"

3mm (T-1)  
2-leads with or without Flange (Not included)

SPC\_040  
O-ring Option

**CNX C**  
Dia. 0.281" (7.1mm)  
Moisture sealed options

5mm (T-1 3/4)  
2-leads with or without Flange (Not included)

SPC\_060  
O-ring Option

**CNX D**  
Dia. 0.281" (7.1mm)

5mm (T-1 3/4)  
3-leads with or without Flange (Not included)

SPC\_060  
O-ring Option

**CNX K**  
Dia. 0.250" (6.35mm)

5mm (T-1 3/4)  
2-leads  
Flangeless only (Not included)

RNG\_242  
Retainer Ring (Included)

Wire Options

22 and 24 AWG  
4, 6, 8, 12, 18, 24, 48 inches

24 AWG  
4, 6, 8, 12, 24 inches

24 AWG  
4, 6, 8, 12, 18, 24 inches

24 AWG  
4, 6, 8, 12, 18, 24 inches

Termination

Stripped End  
Wire color options

W Terminals  
No Connector

Stripped End  
Wires color options

Stripped End  
Wire color options

Stripped End  
Wire color options

Single Row  
Locking Connector  
2 Wires Option Only

Single Row  
Locking Connector  
2 Wires Option Only

Single Row  
Locking Connector  
3 Wires Option Only

Single Row  
Locking Connector  
2 Wires Option Only

Single Row  
Plain Connector  
2 Wires Option Only

Single Row  
Plain Connector  
2 Wires Option Only

Single Row  
Plain Connector  
2 Wires Option Only

Lens Options

SMC\_170  
Fresnel Lens

CMC\_313  
Plain Diffused Lens

CMC\_323  
Plain Lens

CML\_325  
Fresnel Lens

SMC\_130  
Round Panel Clip

CMC\_321  
Fresnel Lens


CMS\_322  
Sealed Fresnel Lens

CML\_327  
Plain Lens

CMC\_285  
Round Panel Clip

CMC\_285  
Round Panel Clip

Example  
**CNX C**

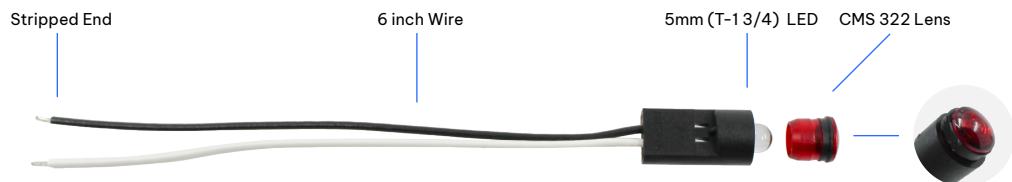

Legend

Waterproof IP Rated

We offer other connectors and crimped connection solutions.  
visit [vclite.com](http://vclite.com)

LED Holder Options

**CNX 310**  
 Dia. 0.281" (7.1mm)  
 Integrated resistor options  
 Moisture sealed options

5mm (T-1 3/4)  
 2-lead with or without Flange (Not included)  
 SPC\_060  
 O-ring Option

**CNX 410**  
 Dia. 0.312" (7.9mm)  
 Integrated resistor options  
 Moisture sealed options

5mm (T-1 3/4)  
 2-lead with or without Flange (Not included)

**CNX 440**  
 Dia. 0.312" (7.9mm)  
 Moisture sealed options

5mm (T-1 3/4)  
 2-lead with or without Flange (Not included)  
 5mm (T-1 3/4)  
 3-lead with or without Flange (Not included)  
 5mm (T-1 3/4)  
 4-lead with or without Flange (Not included)

**CNX 460**  
 Dia. 0.562" (14.29mm)  
 Moisture sealed options

10mm (T-3 1/4)  
 2-lead with or without Flange (Not included)  
 10mm (T-3 1/4)  
 3-lead with or without Flange (Not included)

Wire Options

24 AWG  
 4, 6, 8, 12, 18, 24 inches

24 AWG  
 4, 6, 8, 12, 18, 24 inches

24 AWG  
 4, 6, 8, 12, 18, 24 inches

24 AWG  
 4, 6, 8, 12, 18, 24 inches

Termination

Stripped End  
 Wire color options  
 Single Row  
 Locking Connector  
 2 Wires Option Only  
 Plain Connector  
 2 Wires Option Only

Stripped End  
 Wire color options  
 Single Row  
 Locking Connector  
 2 Wires Option Only

Stripped End  
 Wire color options  
 Single Row  
 Locking Connector  
 2, 3, or 4 Wire Options  
 Dual Row  
 Locking Connector  
 2, 3, or 4 Wire Options

Stripped End  
 Wire color options  
 Single Row  
 Locking Connector  
 2, 3, or 4 Wire Options  
 Dual Row  
 Locking Connector  
 2, 3, or 4 Wire Options

Lens Options

CMC\_313 Plain Diffused Lens  
 CMC\_323 Plain Lens  
 CMC\_321 Fresnel Lens  
 CMS\_322 Sealed Fresnel Lens  
 CMC\_285 Round Panel Clip

CMC\_441 Fresnel Lens  
 CMS\_442 Seled Fresnel Lens

CMC\_441 Fresnel Lens  
 CMS\_442 Sealed Fresnel Lens  
 CMC\_443 Plain Lens  
 CMS\_444 Sealed Plain Lens

HMC\_461 Fresnel Lens  
 HMS\_462 Sealed Fresnel Lens

Example  
**CNX 440**



**Legend**

Waterproof IP Rated

We offer other connectors and crimped connection solutions.  
 visit [vclite.com](http://vclite.com)