

LED Holder Options



CNX B
Dia. 0.171"



3mm (T-1)
2-leads with or without Flange



SPC 040
O-ring Option




CNX C
Dia. 0.281" (7.1mm)
Moisture sealed options



5mm (T-1 3/4)
2-leads with or without Flange



SPC 060
O-ring Option




CNX D
Dia. 0.281" (7.1mm)




5mm (T-1 3/4)
3-leads with or without Flange




SPC 060
O-ring Option



CNX K
Dia. 0.281" (7.1mm)




5mm (T-1 3/4)
2-leads Flangeless only



RNG 242
Retainer Ring Option

Wire Options



22 and 24 AWG
4, 6, 8, 12, 18, 24, 48 inches



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches

Termination



Stripped End
Wire color options



W Terminals
No Connector



Stripped End
Wires color options



Stripped End
Wire color options



Stripped End
Wire color options




Single Row
Locking Connector
2 Wires Option Only



Single Row
Locking Connector
2 Wires Option Only



Single Row
Locking Connector
3 Wires Option Only



Single Row
Locking Connector
2, 3, or 4 Wire Options



Single Row
Plain Connector
2 Wires Option Only



Single Row
Plain Connector
2 Wires Option Only



Single Row
Plain Connector
2 Wires Option Only

Lens Options



SMC 130
Plain Lens



CMC 313
Plain Diffused Lens



CMC 323
Plain Lens



CML 325
Fresnel Lens



SMC 170
Fresnel Lens



CMC 321
Fresnel Lens



CMS 322
Sealed Fresnel Lens



CML 327
Plain Lens




CMC 285
Round Panel Clip



CMC 285
Round Panel Clip

Example
CNX C

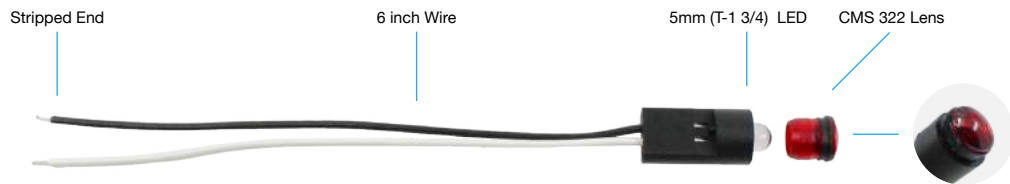

Legend

 Waterproof IP Rated



We offer other connectors and crimped connection solutions. visit vcclite.com


LED Holder Options




CNX 310
Dia. 0.281" (7.1mm)
Integrated resistor options
Moisture sealed options

5mm (T-1 3/4)
2-lead with or without Flange

SPC 060
O-ring Option



CNX 410
Dia. 0.313" (7.9mm)
Integrated resistor options
Moisture sealed options

5mm (T-1 3/4)
2-lead with or without Flange





CNX 440
Dia. 0.312" (7.9mm)
Moisture sealed options

5mm (T-1 3/4)
2-lead with or without Flange

5mm (T-1 3/4)
3-lead with or without Flange

5mm (T-1 3/4)
4-lead with or without Flange




CNX 460
Dia. 0.562" (14.29mm)
Moisture sealed options

10mm (T-3 1/4)
2-lead with or without Flange

10mm (T-3 1/4)
3-lead with or without Flange

Wire Options



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches

Termination



Stripped End
Wire color options




Single Row
Locking Connector
2 Wires Option Only




Single Row
Plain Connector
2 Wires Option Only





Stripped End
Wire color options





Single Row
Locking Connector
2 Wires Option Only



Stripped End
Wire color options




Single Row
Locking Connector
2, 3, or 4 Wire Options



Dual Row
Locking Connector
2, 3, or 4 Wire Options



Stripped End
Wire color options






Single Row
Locking Connector
2, 3, or 4 Wire Options





Dual Row
Locking Connector
2, 3, or 4 Wire Options


Lens Options





CMC 313
Plain Diffused Lens






CMC 323
Plain Lens




CMC 321
Fresnel Lens




CMC 322
Sealed Fresnel Lens




CMC 285
Round Panel Clip



CMC 441
Fresnel Lens




CMS 442
Seled Fresnel Lens




CMC 441
Fresnel Lens




CMS 442
Sealed Fresnel Lens




CMC 443
Plain Lens




CMS 444
Sealed Plain Lens




HMC 461
Fresnel Lens




HMS 462
Sealed Fresnel Lens




HMC 463
Plain Lens




HMS 464
Sealed Plain Lens


Example
CNX 440



Legend

 Waterproof IP Rated



We offer other connectors and crimped connection solutions.
visit vccite.com