

LED Holder Options



**CNX B**  
Dia. 0.171"



3mm (T-1)  
2-leads with or without Flange



SPC 040  
O-ring Option




**CNX C**  
Dia. 0.281" (7.1mm)  
Moisture sealed options



5mm (T-1 3/4)  
2-leads with or without Flange



SPC 060  
O-ring Option




**CNX D**  
Dia. 0.281" (7.1mm)




5mm (T-1 3/4)  
3-leads with or without Flange




SPC 060  
O-ring Option



**CNX K**  
Dia. 0.281" (7.1mm)



5mm (T-1 3/4)  
2-leads Flangeless only



RNG 242  
Retainer Ring Option

Wire Options

22 and 24 AWG  
4, 6, 8, 12, 18, 24, 48 inches

24 AWG  
4, 6, 8, 12, 18, 24 inches

24 AWG  
4, 6, 8, 12, 18, 24 inches


24 AWG  
4, 6, 8, 12, 18, 24 inches

Termination

 Stripped End  
Wire color options  
 W Terminals  
No Connector

 Stripped End  
Wires color options  



 Stripped End  
Wire color options  


 Stripped End  
Wire color options  


 Single Row  
Locking Connector  
2 Wires Option Only

 Single Row  
Locking Connector  
2 Wires Option Only

 Single Row  
Locking Connector  
3 Wires Option Only

 Single Row  
Locking Connector  
2 Wires Option Only

 Single Row  
Plain Connector  
2 Wires Option Only



 Single Row  
Plain Connector  
2 Wires Option Only

 Single Row  
Plain Connector  
2 Wires Option Only

Lens Options

 SMC 170  
Fresnel Lens  


 CMC 313  
Plain Diffused Lens  


 CMC 323  
Plain Lens  


 CML 325  
Fresnel Lens  



 SMC 130  
Round Panel Clip

 CMC 321  
Fresnel Lens  

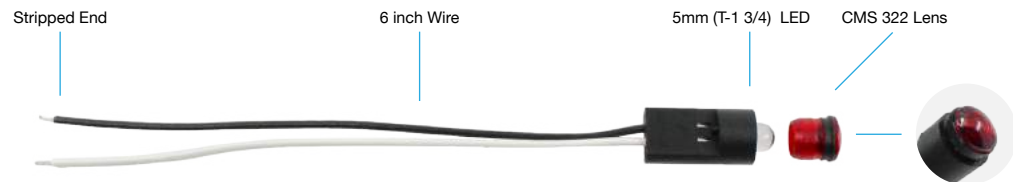

 CMS 322  
Sealed Fresnel Lens  


 CML 327  
Plain Lens  


 CMC 285  
Round Panel Clip

 CMC 285  
Round Panel Clip

Example  
**CNX C**



Legend

 Waterproof IP Rated



We offer other connectors and crimped connection solutions.  
visit [vccite.com](http://vccite.com)



## LED Holder Options




**CNX 310**  
Dia. 0.281" (7.1mm)  
Integrated resistor options  
Moisture sealed options



**5mm (T-1 3/4)**  
2-lead with or without Flange


**SPC 060**  
O-ring Option

**CNX 410**  
Dia. 0.313" (7.9mm)  
Integrated resistor options  
Moisture sealed options

**5mm (T-1 3/4)**  
2-lead with or without Flange



**CNX 440**  
Dia. 0.312" (7.9mm)  
Moisture sealed options

**5mm (T-1 3/4)**  
2-lead with or without Flange

**5mm (T-1 3/4)**  
3-lead with or without Flange

**5mm (T-1 3/4)**  
4-lead with or without Flange





**CNX 460**  
Dia. 0.562" (14.29mm)  
Moisture sealed options

**10mm (T-3 1/4)**  
2-lead with or without Flange

**10mm (T-3 1/4)**  
3-lead with or without Flange

## Wire Options



**24 AWG**  
4, 6, 8, 12, 18, 24 inches



**24 AWG**  
4, 6, 8, 12, 18, 24 inches



**24 AWG**  
4, 6, 8, 12, 18, 24 inches



**24 AWG**  
4, 6, 8, 12, 18, 24 inches

## Termination



**Stripped End**  
Wire color options  






**Single Row**  
Locking Connector  
2 Wires Option Only




**Single Row**  
Plain Connector  
2 Wires Option Only




**Stripped End**  
Wire color options  





**Single Row**  
Locking Connector  
2 Wires Option Only



**Stripped End**  
Wire color options  




**Single Row**  
Locking Connector  
2, 3, or 4 Wire Options



**Dual Row**  
Locking Connector  
2, 3, or 4 Wire Options



**Stripped End**  
Wire color options  






**Single Row**  
Locking Connector  
2, 3, or 4 Wire Options




**Dual Row**  
Locking Connector  
2, 3, or 4 Wire Options


## Lens Options





**CMC 313**  
Plain Diffused Lens  






**CMC 323**  
Plain Lens  
○



**CMC 321**  
Fresnel Lens  




**CMC 322**  
Sealed Fresnel Lens  




**CMC 285**  
Round Panel Clip



**CMC 441**  
Fresnel Lens  




**CMS 442**  
Seled Fresnel Lens  




**CMC 441**  
Fresnel Lens  




**CMS 442**  
Sealed Fresnel Lens  




**CMC 443**  
Plain Lens  
○



**CMS 444**  
Sealed Plain Lens  
○



**HMC 461**  
Fresnel Lens  




**HMS 462**  
Sealed Fresnel Lens  




**HMC 463**  
Plain Lens  
○



**HMS 464**  
Sealed Plain Lens  
○

Example  
**CNX 440**



## Legend

 Waterproof IP Rated



**We offer other connectors and crimped connection solutions.**  
visit [vcclite.com](http://vcclite.com)