

LED Holder Options

CNX B
Dia. 0.171"

3mm (T-1)
2-leads with or without Flange

SPC_040
O-ring Option

CNX C
Dia. 0.281" (7.1mm)
Moisture sealed options

5mm (T-1 3/4)
2-leads with or without Flange

SPC_060
O-ring Option

CNX D
Dia. 0.281" (7.1mm)

5mm (T-1 3/4)
3-leads with or without Flange

SPC_060
O-ring Option

CNX K
Dia. 0.250" (6.35mm)

5mm (T-1 3/4)
2-leads Flangeless only

RNG_242
Retainer Ring (Included)

Wire Options

22 and 24 AWG
4, 6, 8, 12, 18, 24, 48 inches

24 AWG
4, 6, 8, 12, 18, 24 inches

24 AWG
4, 6, 8, 12, 18, 24 inches

24 AWG
4, 6, 8, 12, 24 inches

Termination

Stripped End
Wire color options

W Terminals
No Connector

Stripped End
Wires color options

Stripped End
Wire color options

Stripped End
Wire color options

Single Row
Locking Connector
2 Wires Option Only

Single Row
Locking Connector
2 Wires Option Only

Single Row
Locking Connector
3 Wires Option Only

Single Row
Locking Connector
2 Wires Option Only

Single Row
Plain Connector
2 Wires Option Only

Single Row
Plain Connector
2 Wires Option Only

Single Row
Plain Connector
2 Wires Option Only

Lens Options

SMC 170
Fresnel Lens

CMC 313
Plain Diffused Lens

CMC 323
Plain Lens

CML 325
Fresnel Lens

SMC 130
Round Panel Clip

CMC 321
Fresnel Lens


CMS 322
Sealed Fresnel Lens

CML 327
Plain Lens

CMC 285
Round Panel Clip

CMC 285
Round Panel Clip

Example
CNX C

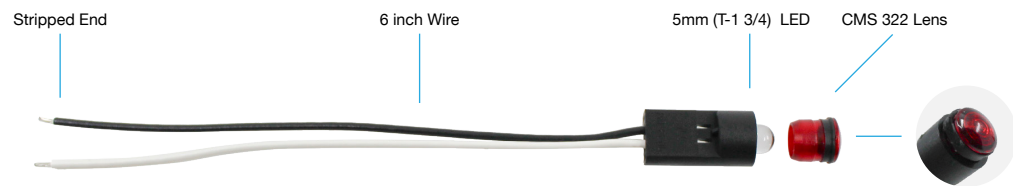

Legend

Waterproof IP Rated

We offer other connectors and crimped connection solutions.
visit vccite.com

LED Holder Options




CNX 310
Dia. 0.281" (7.1mm)
Integrated resistor options
Moisture sealed options



5mm (T-1 3/4)
2-lead with or without Flange

SPC_060
O-ring Option




CNX 410
Dia. 0.313" (7.9mm)
Integrated resistor options
Moisture sealed options

5mm (T-1 3/4)
2-lead with or without Flange






CNX 440
Dia. 0.312" (7.9mm)
Moisture sealed options

5mm (T-1 3/4)
2-lead with or without Flange

5mm (T-1 3/4)
3-lead with or without Flange

5mm (T-1 3/4)
4-lead with or without Flange





CNX 460
Dia. 0.562" (14.29mm)
Moisture sealed options

10mm (T-3 1/4)
2-lead with or without Flange

10mm (T-3 1/4)
3-lead with or without Flange

Wire Options



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches

Termination




Stripped End
Wire color options






Single Row
Locking Connector
2 Wires Option Only



Single Row
Plain Connector
2 Wires Option Only



Stripped End
Wire color options




Single Row
Locking Connector
2 Wires Option Only




Stripped End
Wire color options






Single Row
Locking Connector
2, 3, or 4 Wire Options




Dual Row
Locking Connector
2, 3, or 4 Wire Options



Stripped End
Wire color options





Single Row
Locking Connector
2, 3, or 4 Wire Options




Dual Row
Locking Connector
2, 3, or 4 Wire Options


Lens Options




CMC 313
Plain Diffused Lens






CMC 321
Fresnel Lens





CMC 285
Round Panel Clip



CMC 323
Plain Lens




CMC 322
Sealed Fresnel Lens




CMC 441
Fresnel Lens




CMS 442
Seled Fresnel Lens




CMC 441
Fresnel Lens




CMS 442
Sealed Fresnel Lens




CMC 443
Plain Lens




CMS 444
Sealed Plain Lens




HMC 461
Fresnel Lens




HMS 462
Sealed Fresnel Lens




HMC 463
Plain Lens




HMS 464
Sealed Plain Lens


Example
CNX 440



Legend

 Waterproof IP Rated



We offer other connectors and crimped connection solutions.
visit vccite.com