

LED Holder Options

CNX B
Dia. 0.171"

3mm (T-1)
2-leads with or without Flange

SPC_040
O-ring Option

CNX C
Dia. 0.281" (7.1mm)
Moisture sealed options

5mm (T-1 3/4)
2-leads with or without Flange

SPC_060
O-ring Option

CNX D
Dia. 0.281" (7.1mm)

5mm (T-1 3/4)
3-leads with or without Flange

SPC_060
O-ring Option

CNX K
Dia. 0.250" (6.35mm)

5mm (T-1 3/4)
2-leads Flangeless only

RNG_242
Retainer Ring (Included)

Wire Options

22 and 24 AWG
4, 6, 8, 12, 18, 24, 48 inches

24 AWG
4, 6, 8, 12, 24 inches

24 AWG
4, 6, 8, 12, 18, 24 inches

24 AWG
4, 6, 8, 12, 18, 24 inches

Termination

Stripped End
Wire color options

W Terminals
No Connector

Stripped End
Wire color options

Stripped End
Wire color options

Stripped End
Wire color options

Single Row
Locking Connector
2 Wires Option Only

Single Row
Locking Connector
2 Wires Option Only

Single Row
Locking Connector
3 Wires Option Only

Single Row
Locking Connector
2 Wires Option Only

Single Row
Plain Connector
2 Wires Option Only

Single Row
Plain Connector
2 Wires Option Only

Single Row
Plain Connector
2 Wires Option Only

Lens Options

SMC_170
Fresnel Lens

CMC_313
Plain Diffused Lens

CMC_323
Plain Lens

CML_325
Fresnel Lens

SMC_130
Round Panel Clip

CMC_321
Fresnel Lens


CMS_322
Sealed Fresnel Lens

CML_327
Plain Lens

CMC_285
Round Panel Clip

CMC_285
Round Panel Clip

Example
CNX C

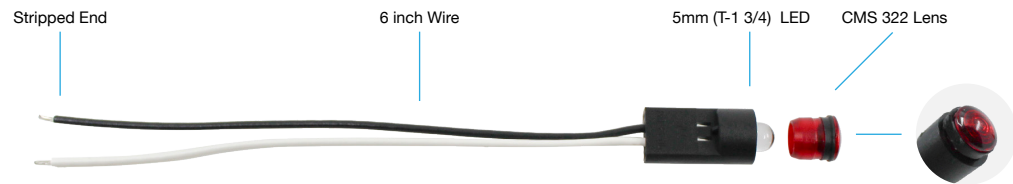

Legend

Waterproof IP Rated

We offer other connectors and crimped connection solutions.
visit vccite.com

LED Holder Options






5mm (T-1 3/4)
2-lead with or without Flange

CNX 310
Dia. 0.281" (7.1mm)
Integrated resistor options
Moisture sealed options



SPC_060
O-ring Option

5mm (T-1 3/4)
2-lead with or without Flange

CNX 410
Dia. 0.313" (7.9mm)
Integrated resistor options
Moisture sealed options




5mm (T-1 3/4)
2-lead with or without Flange

CNX 440
Dia. 0.312" (7.9mm)
Moisture sealed options



5mm (T-1 3/4)
3-lead with or without Flange



5mm (T-1 3/4)
4-lead with or without Flange




10mm (T-3 1/4)
2-lead with or without Flange

CNX 460
Dia. 0.562" (14.29mm)
Moisture sealed options



10mm (T-3 1/4)
3-lead with or without Flange

Wire Options



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches



24 AWG
4, 6, 8, 12, 18, 24 inches

Termination




Stripped End
Wire color options






Single Row
Locking Connector
2 Wires Option Only




Single Row
Plain Connector
2 Wires Option Only





Stripped End
Wire color options





Single Row
Locking Connector
2 Wires Option Only



Stripped End
Wire color options




Single Row
Locking Connector
2, 3, or 4 Wire Options



Dual Row
Locking Connector
2, 3, or 4 Wire Options



Stripped End
Wire color options






Single Row
Locking Connector
2, 3, or 4 Wire Options





Dual Row
Locking Connector
2, 3, or 4 Wire Options


Lens Options




CMC_313
Plain Diffused Lens





CMC_321
Fresnel Lens





CMC_285
Round Panel Clip



CMC_323
Plain Lens




CMS_322
Sealed Fresnel Lens




CMC_441
Fresnel Lens




CMS_442
Seled Fresnel Lens




CMC_441
Fresnel Lens




CMS_442
Sealed Fresnel Lens




CMC_443
Plain Lens




CMS_444
Sealed Plain Lens




HMC_461
Fresnel Lens




HMS_462
Sealed Fresnel Lens


Example
CNX 440



Legend

 Waterproof IP Rated



We offer other connectors and crimped connection solutions. visit vcclite.com