




PML50 Harsh Environment Series

0.688" (17.5mm) LED PMIs with FlexVolt™ Technology

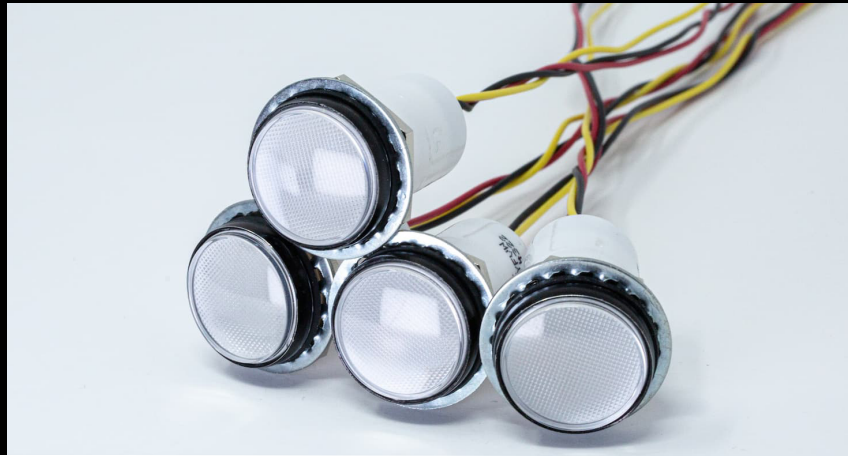

IP67 RATED



LED COLOR OPTIONS



LED BI-COLOR OPTIONS





MOUNTING HOLE Ø 0.688



WIDE VIEWING ANGLE



DAYLIGHT VISIBILITY

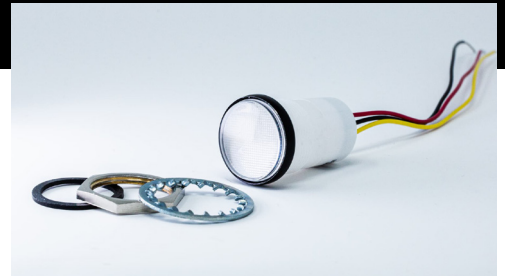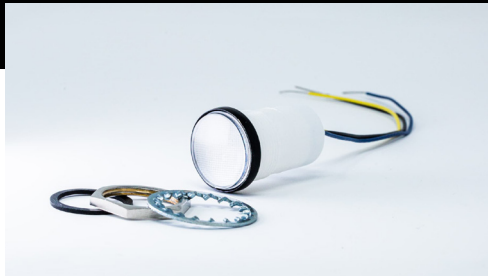

Our Hardest-Working LED PMIs, Available in IP67-Rated Single and Bi-Color Options for Added Flexibility

VCC's ruggedized PML50 Harsh Environment LED panel mount indicators provide optimal performance and flexible power in a durable & engineer-friendly package — for new products and retrofits.

Several Bi-Color Options

simplify the PMI while reducing component size and costs

Wide Operational Range

flexibility of 5-28 VDC with VCC's FlexVolt™ technology

Enhanced Daylight Visibility

wide viewing angle and full brightness in milliseconds

Long-Lasting Illumination

reliable performance with an operating life of up to 100K hours

Streamlined Assembly

color-coded wiring for easy color/indication identification

Harsh-Environment Ready

IP67 rating ideal for dusty and/or moisture-rich conditions

Applications



Industrial



Maritime, Oil & Gas



Automation & Controls



Instrumentation



Transportation



Slot, Gaming, and Vending Machines

Product Overview

Mounting Hole

0.688" (177.5mm)

Terminal

24 AWG 5.5" color-coded wire leads

Colors

Single: Red, Green, White, Blue, Yellow
Bi-color: Red/Green, Red/Blue,
Yellow/Green, Yellow/Blue, Red//Yellow

Lens


Flat profile with clear lens

Voltage

FlexVolt™ 5 VDC to 28 VDC

Compliance

RoHS | Reach

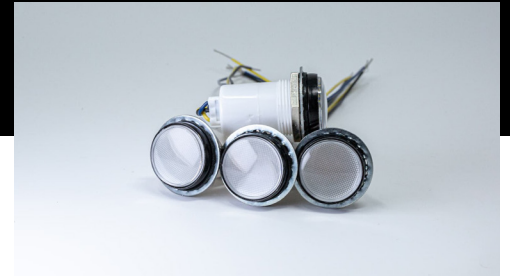

Part Numbers	Colors	Lens Option
PML50RFVW	Red	Flat
PML50WFVW	White	Flat
PML50GFVW	Green	Flat
PML50BFVW	Blue	Flat
PML50YFVW	Yellow	Flat
PML50RGFVW	Red/Green	Flat
PML50RBFVW	*Red/Blue	Flat
PML50YGFVW	*Yellow/Green	Flat
PML50YBFVW	*Yellow/Blue	Flat
PML50RYFVW	*Red/Yellow	Flat

** indicating new colors*

Contact your local sales rep or distributor to order the PMIs created to elevate device design.

1.800.522.5546
vcclite.com

