



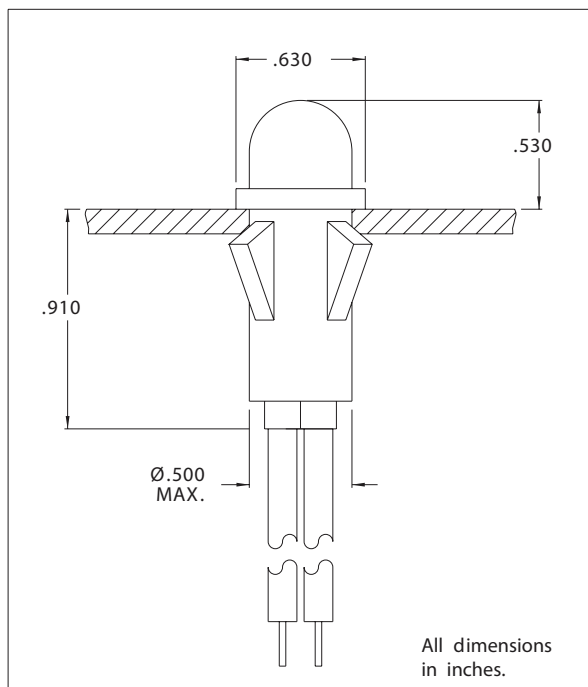

# 1050A, 1051A, 1052A, 1053A and 1090A Series Non-Relampable Neon-Incandescent Indicator Lights

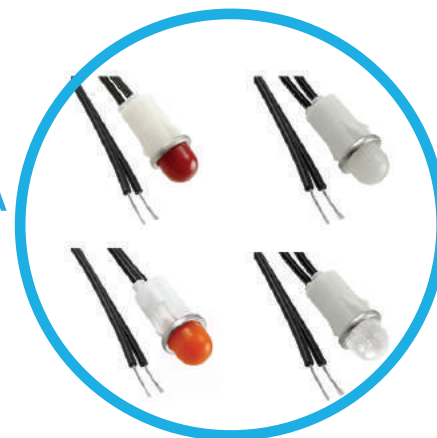

Mounting: Will snap-fit into Ø.500" hole in panels .020" -.100" thick. Push-on speednut SN0461-C also available.

Wire Leads: No. 22 AWG (105°C) 4.40"/4.80" long, stripped .430"/.570"

Lens: Nylon on model 1050A1, 1050A3, 1050A4, 1050A1, 1051A3, 1051A4, Polycarbonate on all other models.

Bezel: Polished stainless steel.

Housing: White Nylon

\* Incorporates G2B lamp and resistor.  
 \*\* Incorporates T2B lamp and resistor.  
 \*\*\* Lead Length: 10" (+1/4", -1/6")

Lens Color	Neon		Incandescent	
	Model No. (105-125VAC)	Model No. (208-250VAC)	Model No. (12V)	Model No. (28V)
Red	1050A1	1051A1/1050R81*	1090A1-12V	1090A1-28V
Clear	1050A2	-	-	-
Amber	1050A3	1051A3	1090A3-12V	1090A3-28V
White	1050A4	-	1090A4-12V	1090A4-28V
Green	1052A5*	1053A5**	1090A5-12V	1090A5-28V
Blue	1052A6**	1053A6***	1090A6-12V	1090A6-28V
Lamp used	C2A+R resistor	C2A+R resistor	#2162	#2187
Lead Color	Black	One Black/One Red	Yellow	Purple

Underwriters Laboratories (UL) File No. E20356

## Compliance & Approvals

